


RADIO CONTROLLED ELECTRIC POWER BOAT INSTRUCTION MANUAL

STEALTH ENFORCER

ITEM NO.:ST760
ST760BL

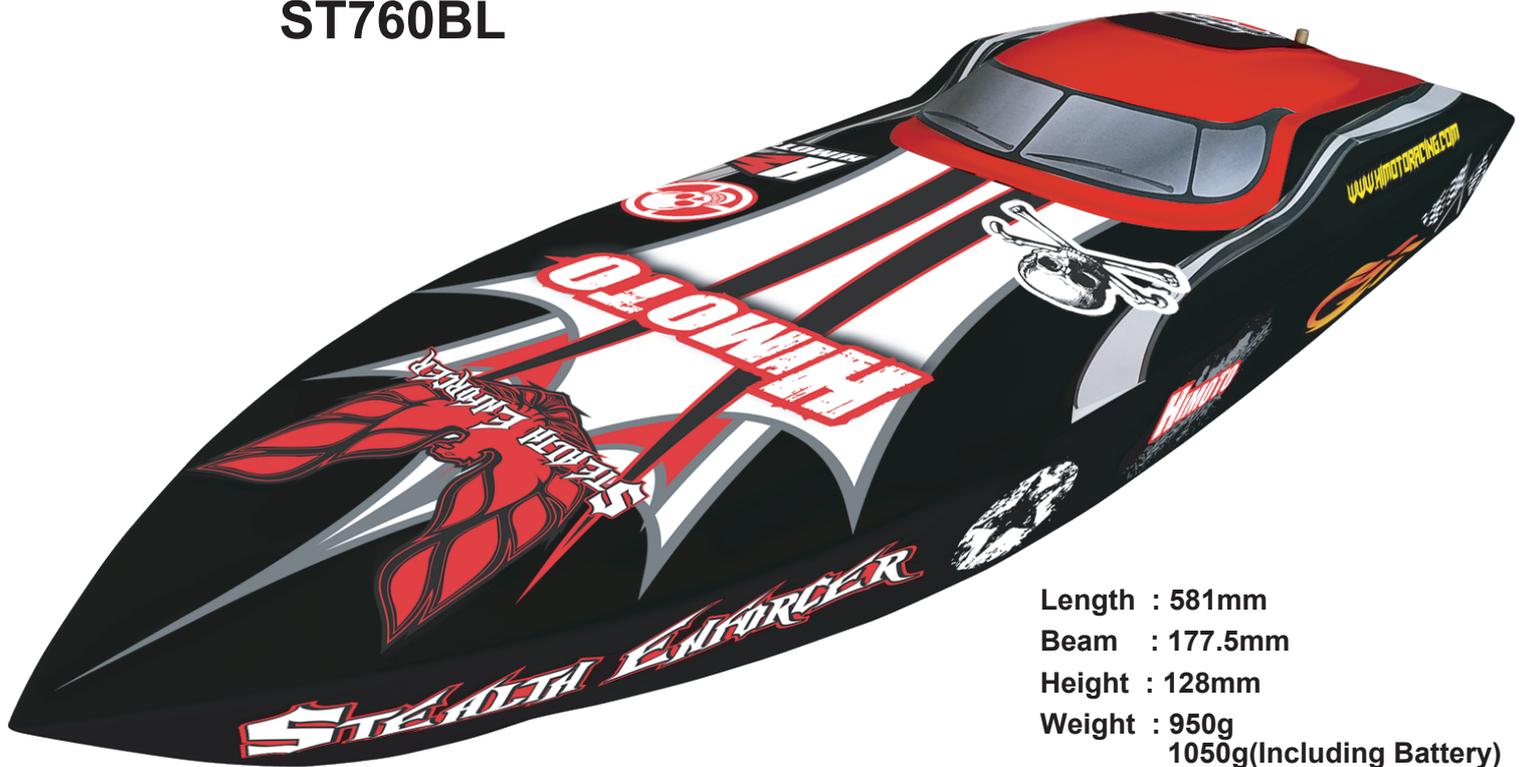

Length : 581mm
Beam : 177.5mm
Height : 128mm
Weight : 950g
1050g(Including Battery)

- Motor : Watercool RC560 Motor(ST760)
Watercool Brushless Motor(ST760BL)
- Speed Control : 2in1 Waterproof ESC / Receiver(ST760)
Waterproof Brushless ESC(ST760BL)
- Battery :10.8V 1100mAh NiMH Battery(ST760)
Li-Po Battery(ST760BL)
- Propeller : 40x32mm
- Hull Material : ABS+PC

MEANING OF SPECIAL LANGUAGE

The following terms are used throughout the product literature to indicate various levels of potential harm when operating this product:

NOTICE: Procedures, which if not properly followed, create a possibility of physical property damage AND little or no possibility of injury.

CAUTION: Procedures, which if not properly followed, create the probability of physical property damage AND a possibility of serious injury.

WARNING: Procedures, which if not properly followed, create the probability of property damage, collateral damage, and serious injury OR create a high probability of superficial injury.

Safety Precautions and Warnings

As the user of this product, you are solely responsible for operating in a manner that does not endanger yourself and others or result in damage to the product or the property of others.

- When handling and/or transporting your boat, always pick up the boat from the front, keeping all moving parts pointed away from you.
- Always keep a safe distance in all directions around your model to avoid collisions or injury. This model is controlled by a radio signal subject to interference from many sources outside your control. Interference can cause momentary loss of control.
- Always operate your model in open spaces away from full-size vehicles, traffic and people.

Age Recommendation:

Not for children under 14 years. This is not a toy.



WARNING: Read the ENTIRE instruction manual to become familiar with the features of the product before operating. Failure to operate the product correctly can result in damage to the product, personal property and cause serious injury.

This is a sophisticated hobby product and NOT a toy. It must be operated with caution and common sense and requires some basic mechanical ability. Failure to operate this Product in a safe and responsible manner could result in injury or damage to the product or other property. This product is not intended for use by children without direct adult supervision. Do not attempt disassembly, use with incompatible components or augment product in any way without the approval of Horizon Hobby, Inc. This manual contains instructions for safety, operation and maintenance. It is essential to read and follow all the instructions and warnings in the manual, prior to assembly, setup or use, in order to operate correctly and avoid damage or serious injury.

- Always carefully follow the directions and warnings for this and any optional support equipment (chargers, rechargeable battery packs, etc.).
- Always keep all chemicals, small parts and anything electrical out of the reach of children.
- Always avoid water exposure to all equipment not specifically designed and protected for this purpose. Moisture causes damage to unprotected electronics.
- Never place any portion of the model in your mouth as it could cause serious injury or even death.
- Never operate your model with low transmitter batteries.


Before You Start Assembling

Thank you for purchasing our Ready To Run electric boat. This manual contains the basic methods of operation, assembly details, and related accessories. Operators less than 14 years of age need to be supervised by an adult. Please read all information in this manual before operation to avoid any damage or danger.


All operating instructions should be read before the use of this product. It contains important information for future reference. In addition, because we constantly update our products, some small physical features may change. Check our website for any update on changes.

Tools Needed


2.5 2.0 1.5 Allen key

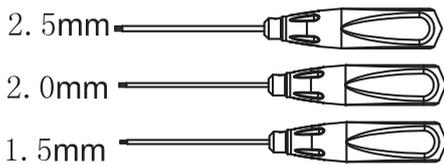


5.5 7 Wrench

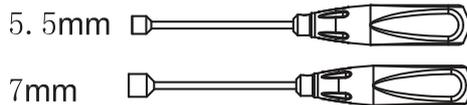


Cross Wrench(big)

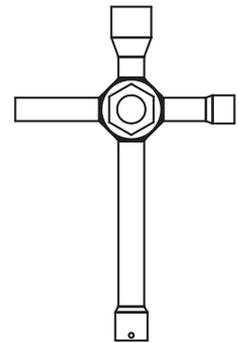


Needle Nose Plier

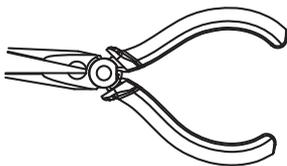


Hobby Scissors

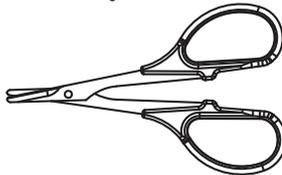


Cross Wrench(small)



5.5mm Open end wrench




Charger



Reamer



Apply CA glue




Grease



1.2V AA Battery



Silicone Oil



Safety Precautions

As the user of this product, you are solely responsible for operating in a manner that does not endanger yourself and others or result in damage to the product or the property of others.

- When handling and/or transporting your boat, always pick up the boat from the front, keeping all moving parts pointed away from you.
- Always keep a safe distance in all directions around your model to avoid collisions or injury. This model is controlled by a radio signal subject to interference from many sources outside your control. Interference can cause momentary loss of control.
- Always operate your model in open spaces away from full-size vehicles, traffic and people.
- Always carefully follow the directions and warnings for this and any optional support equipment (chargers, rechargeable battery packs, etc.).
- Always keep all chemicals, small parts and anything electrical out of the reach of children.
- Always avoid water exposure to all equipment not specifically designed and protected for this purpose. Moisture causes damage to unprotected electronics.
- Never place any portion of the model in your mouth as it could cause serious injury or even death.
- Never operate your model with low transmitter batteries.

Age Recommendation: Not for children under 14 years. This is not a toy. Safety precautions and Warnings

Warranties

Ask retailers for replacement or return for manufacturing defective or missing parts. There is no warranty against wear and tear caused by incorrect operation or use of incorrect parts.

Retailers are to provide technical assistance free of charge for beginners.

Operational Requirements

First, make sure batteries are fully charged. Check all connections and settings .

Install 4AA batteries in the remote, ensure that the batteries have full power, pay attention to positive and negative polarity, and do not install in the wrong direction.

The remote control system has a variety of different functions and settings. Before initial use, ensure that all functions and settings have been fully understood.

2.4GHZ RADIO SYSTEM


HTX-242





Install the batteries

- (1) Remove the battery compartment cover.
- (2) Replace the used batteries with new AA size batteries.


Please replace batteries when the power indicator blinks or the buzzer beeps.

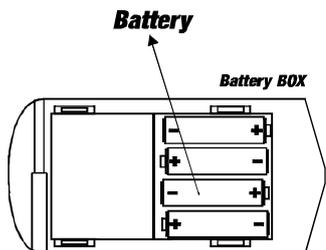

TRANSMITTER DIAGRAM

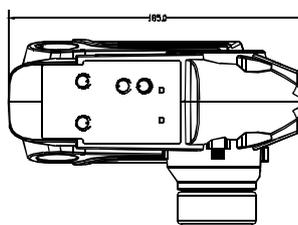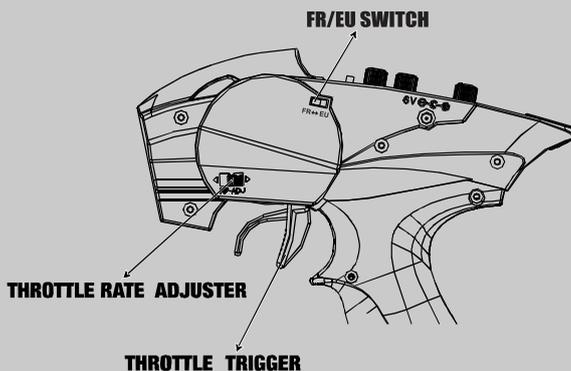




Transmitter Size

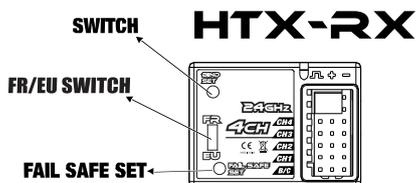


Connectors

- 1: Steering servo (CH1)
- 2: Throttle servo (CH2)
- 3: CH3 servo (CH3)
- 4: CH4 servo (CH4)
- B/C: Power connector


Receiver Size

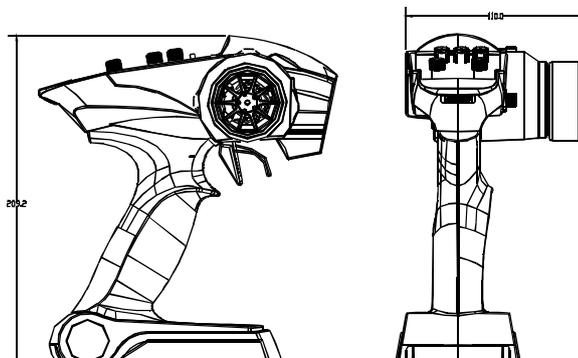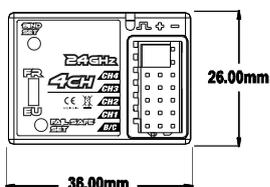

Transmitter Adjustment

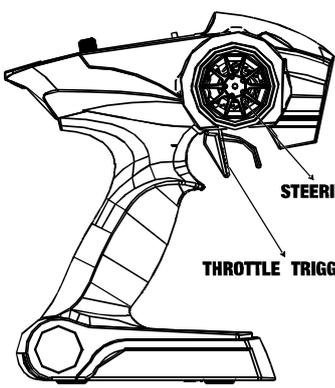

A. Throttle Trigger




1. Push the trigger forward to slow down or brake.
2. Pull the trigger backward to accelerate.

Throttle Trim: Position the throttle trigger at the neutral position, adjust the throttle trim accordingly.

Steering Trim: If the front wheel does not align straight, use the steering trim to make adjustment.

B. Steering Wheel



Turn the steering wheel counterclockwise to turn left, turn the steering wheel clockwise to turn right.

 Position the transmitter and receiver 40cm apart when operating.

Fail Safe Function Setting

1. Set the TH, ST switches to the normal position.
2. Turn on the transmitter and receiver.
3. Press the F/S SET button, the LED on the receiver should start flashing rapidly.
4. Put the throttle trigger at the brake position, press the F/S SET button, the LED should become solid.
5. For electric model, put the throttle trigger at the stop position when you are making the setting.


Low Battery Alarm

Do not operate the radio system when the battery power is low.

2.4GHz

Binding the transmitter and receiver



- 

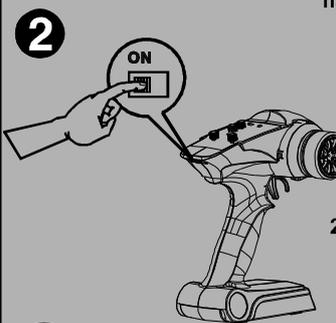1. turn on the receiver power. Press the SW switch. The receiver's LED should start flashing.
- 

2. Turn on the transmitter.
- 

3. When the LED on the receiver becomes solid, the binding process is completed.

Receiver and servo connection

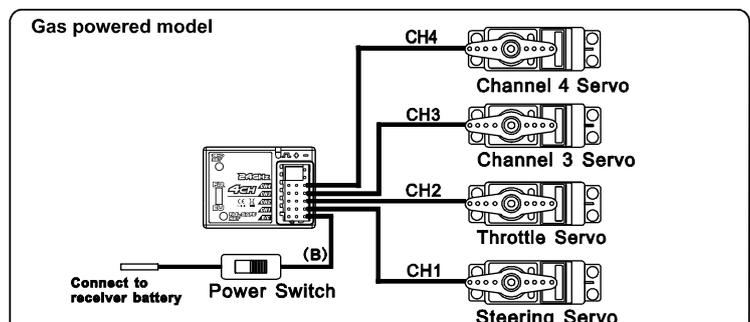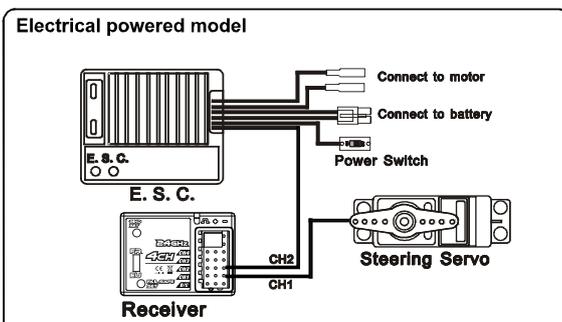

HTX-241RE


Features

2 in 1 Receiver/Esc Easy to operate


Specifications

- Input voltage : 6V-8. 4V DC
- BEC : 5V 1A
- Output current : Continuously 320A, Instantly 160A
- Size : L47mm * W33mm * H26mm
- Motor : High Power 540/23T motor

Wiring diagram

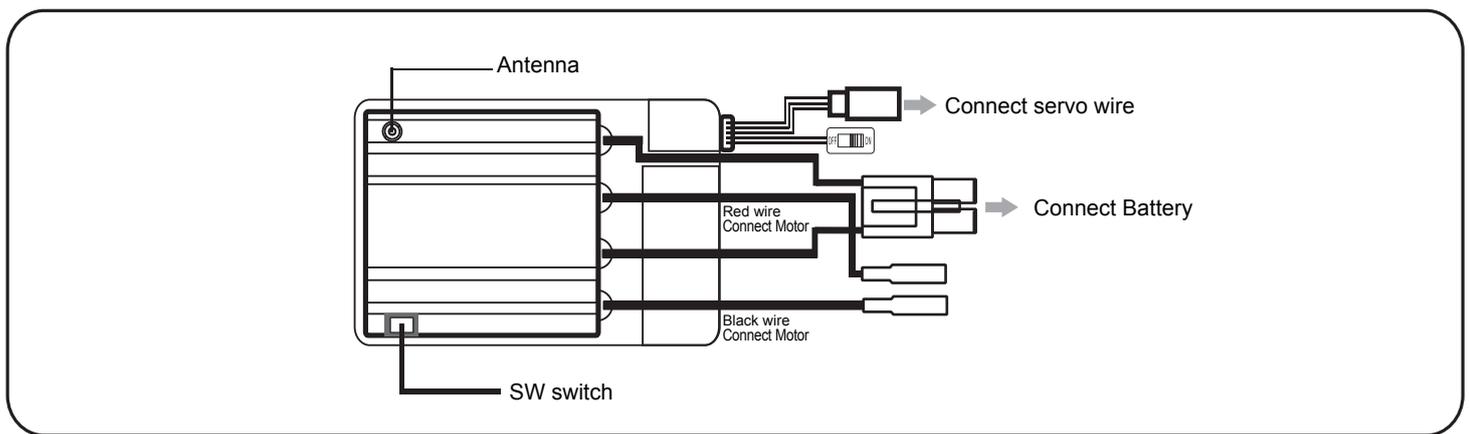

Binding the transmitter and receiver

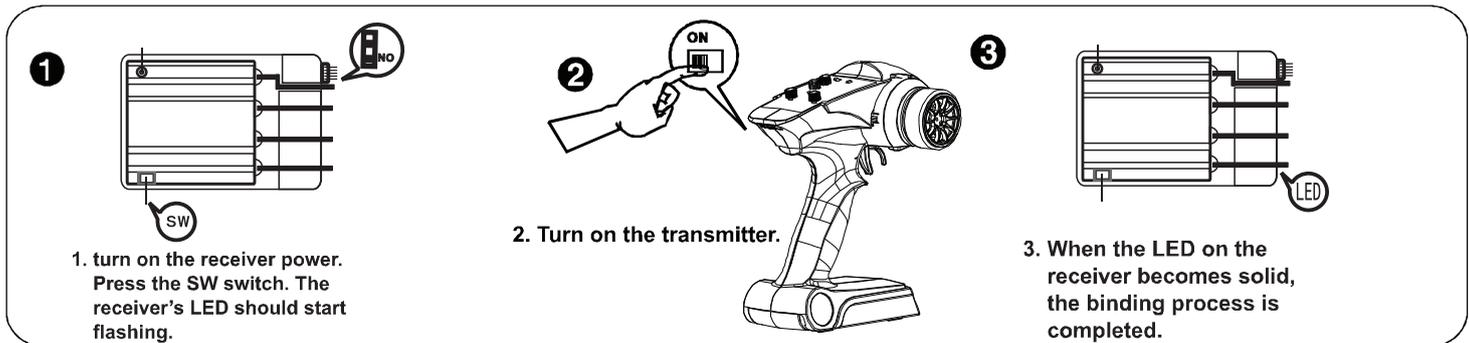


Functional Description

1. Push the trigger forward to slow down or brake.
2. Pull the trigger backward to accelerate.

Throttle Trim: Position the throttle trigger at the neutral position, adjust the throttle trim accordingly.

Steering Trim: If the front wheel does not align straight, use the steering trim to make adjustment

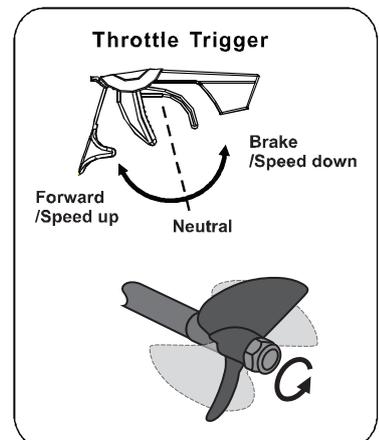


Note

This product has a water resistance function

Operation Check List

1. Install fresh, new batteries into the transmitter and vehicle. Verify all the control functions are working properly.
2. Verify steering is set to the neutral position, the front wheels of the vehicle should point straight forward when the steering wheel on the transmitter is centered.
3. The ESC on the vehicle is pre-configured at the factory. When you turn on the transmitter and vehicle, you should hear a beep in 1-2 seconds and the indicator light should be lit.
4. With the battery fully charged, the run time for the vehicle is around 7 to 15 minutes depends on the condition of the running environment. Please stop operation when the battery show sign of low power.

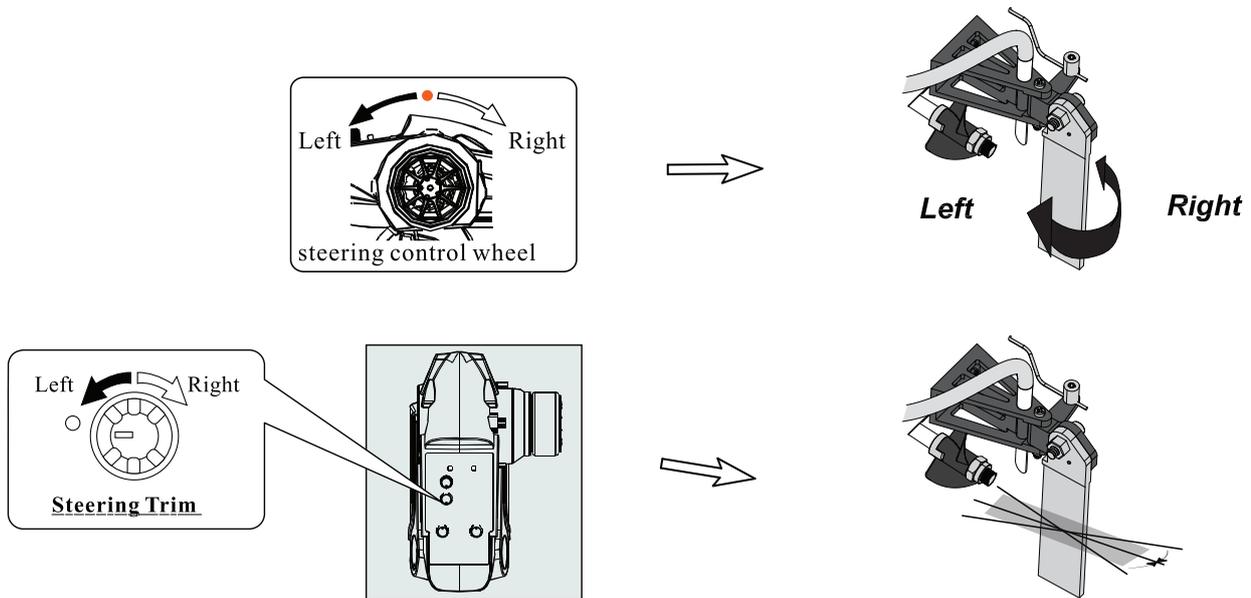

Common Troubleshooting

Problem: Motor is not working

Causes: A broken motor coil, battery capacity is inadequate or not charged, remote control not turned on or esc switch not turned on.

Solution: Replace motor, change batteries, turn switches on

Problem: Poor motor performance

Causes: Battery power is low, ESC (Electric speed control) is not adjusted properly, drive train loosened.

Solution: Replace or recharge the battery. When you first turn on the car, don't touch throttle trigger until all noise stop. Check that the gear mesh is not too tight or loose.

Problem: Difficult to steer the car

Causes: Transmitter or receiver battery are low, steering servo trim not set correctly

Solution: Replace or recharge the battery; when car is not moving, manually set steering trim so that the wheels are pointed forward.

SPECIFICATIONS

Stealth Enforcer

Length 581mm

Beam 177.5mm

Transmitter 2.4GHz Radio
Control TX

Motor : Watercool RC560 Motor(ST760)
Watercool Brushless Motor(ST760BL)


Speed Control : 2in1 Waterproof ESC / Receiver(ST760)
Waterproof Brushless ESC(ST760BL)

Battery :10.8V 1100mAh NiMH Battery(ST760)
Li-Po Battery(ST760BL)

Propeller : 40x32mm
Hull Material : ABS+PC

Boat Battery Pack Installation

1. Lift the back of the canopy lid off the magnet and pull it back and away from the hull to remove.
2. Adhere loop tape (included) to the battery. Do not cover the battery warning label.
3. Connect the battery.
4. Secure the boat battery on the hook strip in the boat.
5. Refer to Getting Started instructions about powering on your boat.

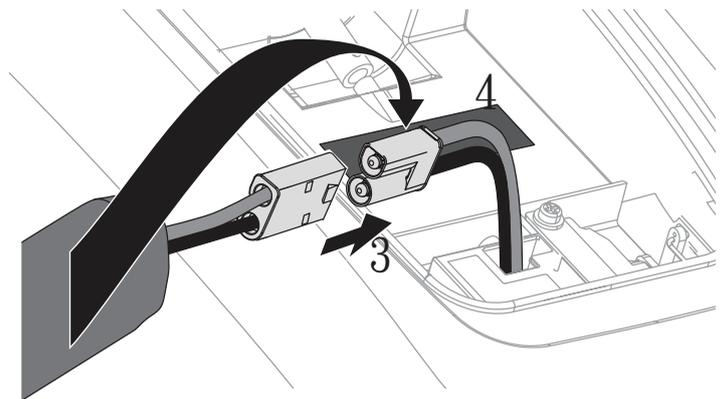

Charging Warnings



WARNING: Never leave a charging battery pack unattended. Monitor the battery periodically for heat and if at any point the temperature exceeds 120F, disconnect from the allow it to cool fully before reconnecting.

Service and Maintenance

In order not to void car warranty, always keep your buggy clean. In areas of high dust and dirt, be sure to blow off dirt and dust with a compressor, soft bristle brush, or toothbrush.


Always check car for loose or broken parts and replace before and after running.

Regularly check screws to make sure that they are tight.

Replacement parts are available at many local retailers or online stores. Feel free to contact retailers for help in replacing parts.

Explode Diagram of the Stealth Enforcer

ITEM ON:ST760/ST760BL

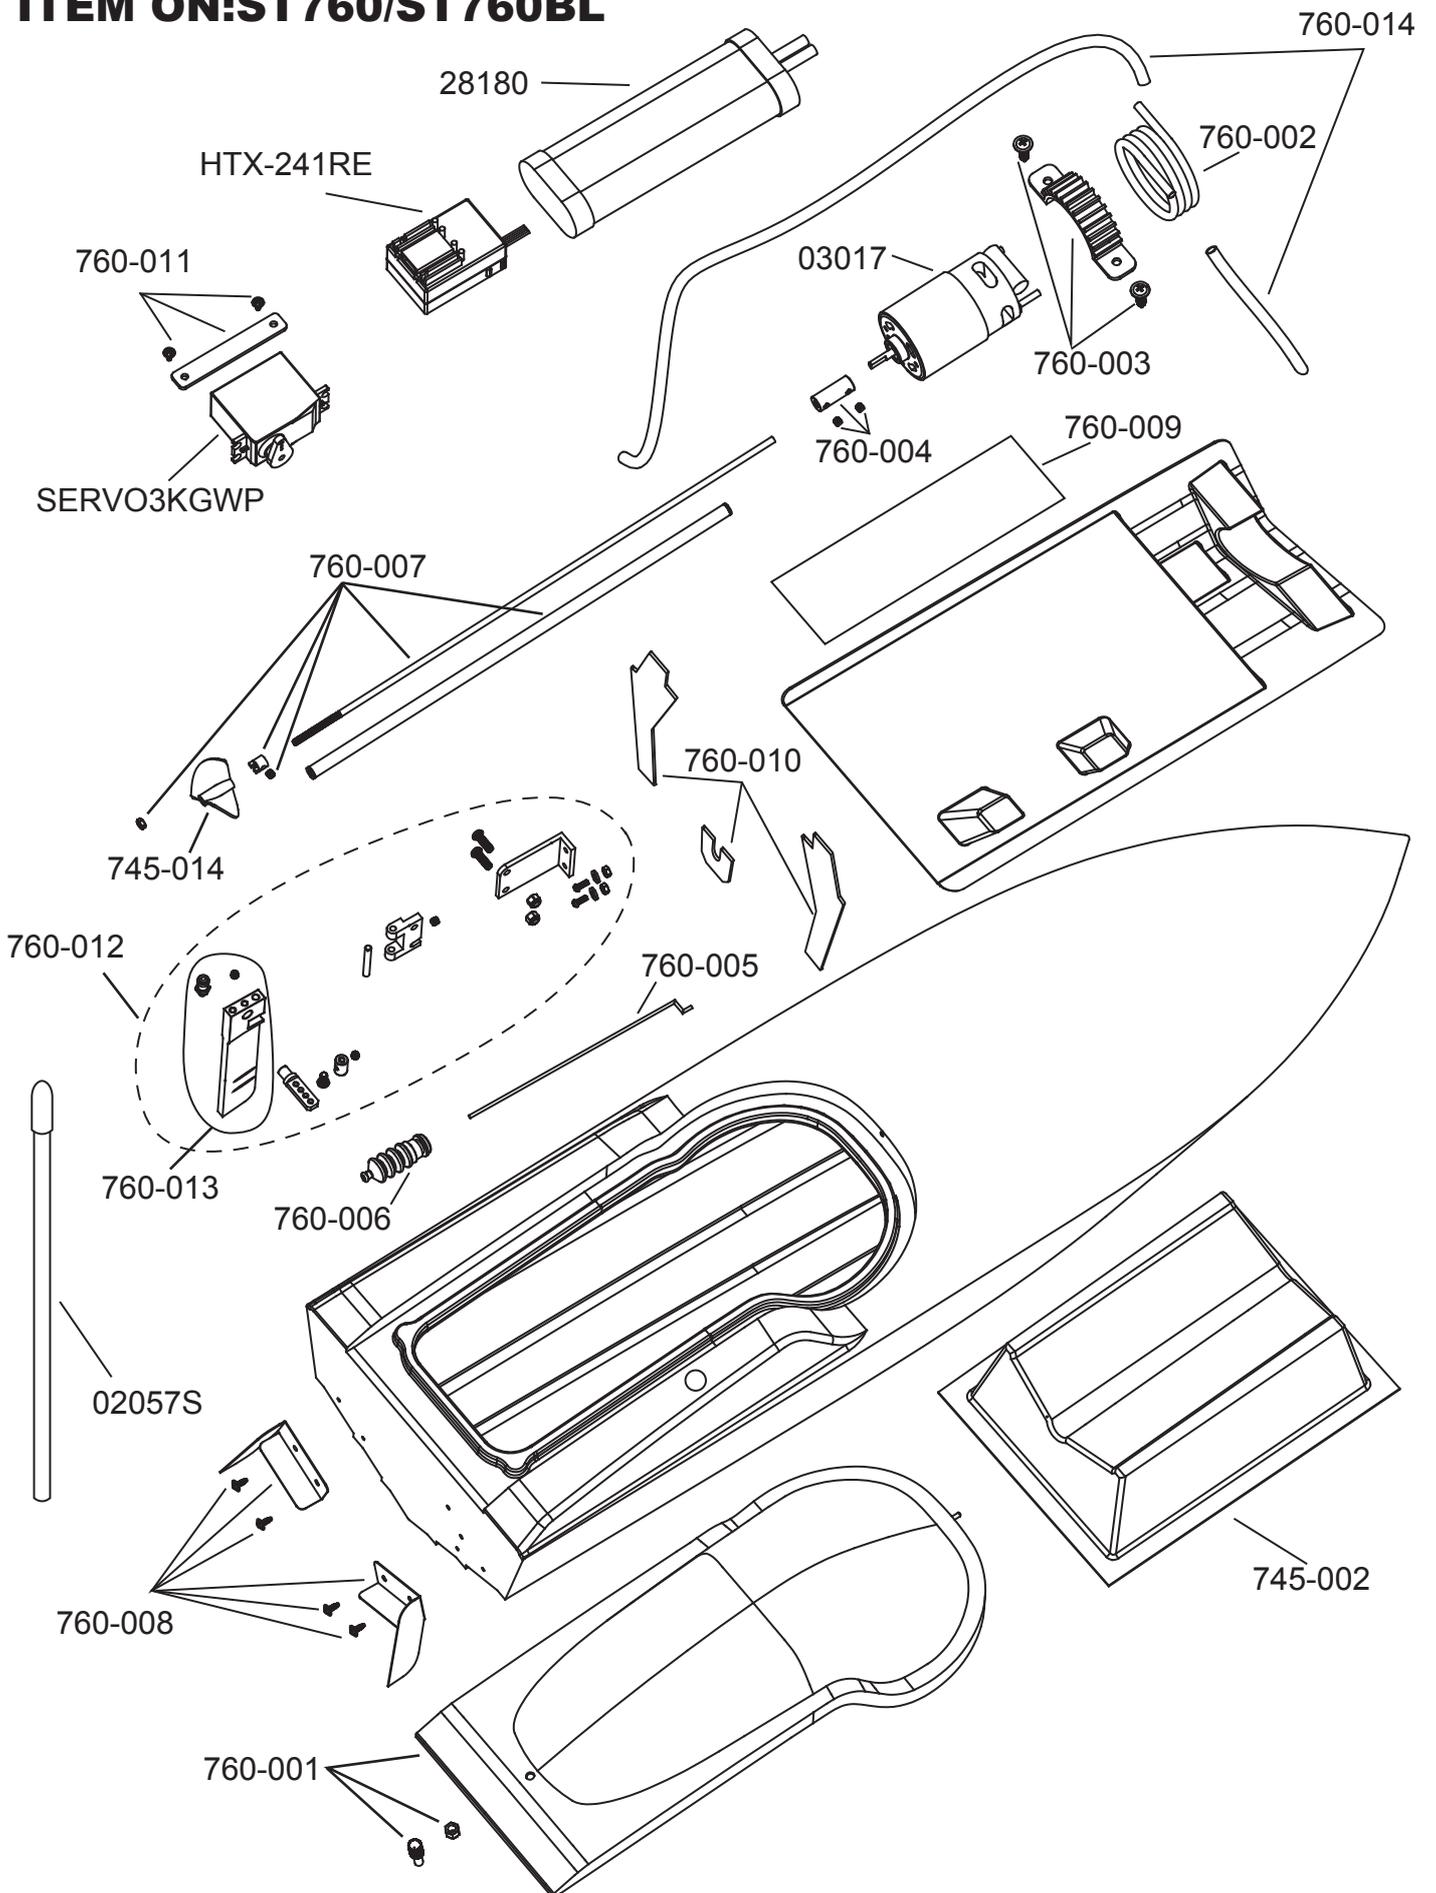

SPARE PARTS

STEALTH ENFORCER

ST760/ST760BL

760-001



Boat Cover

745-002



Boat Stand

760-002



Water Cooling

760-003



Motor Tablet

760-004



Coupler

760-005



Push Rod

760-006



Organ

760-007



Shafting Assembly

745-014



Propeller

760-008



Trim Flap

760-009



Foam Double Tape 4P

760-010



Reinforcement parts

760-011



Servo Holddown
w/fasteners

760-012



Rudder Mnt&Assy

760-013



Rudder

760-014



Fuel Pipe

02057S



Antenna Pipe

ELECTRONICS

HTX-242T



2.4G Radio Control TX

HTX-241RE



ST760 ONLY
2in1 Waterproof
ESC/Receiver

03017



ST760 ONLY
Watercool RC560 Motor

28180



10.8V 1100mAh NiMH Battery

SERVO3KGWP



3kg Waterproof Mini Servo

EOMU



Multi Charger

BRUSHLESS VERSION

HTX-RXWP

Option Part



Waterproof
4channels 2.4G Receiver

21405

Option Part



ST760BL ONLY
Waterproof
Brushless Esc

21480

Option Part



ST760BL ONLY
Watercool Brushless Motor

LP1180

Option Part



Li-Po Battery

A3AU Option Part
A3EU
A3UK
A3US



Li-Po Battery Charger

SPARE PARTS LIST

760-001	Boat Cover	SP
745-002	Boat Stand	SP
760-002	Water Cooling	SP
760-003	Motor Tablet	SP
760-004	Coupler	SP
760-005	Push Rod	SP
760-006	Organ	SP
760-007	Shafting Assembly	SP
745-014	Propeller	SP
760-008	Trim Flap	SP
760-009	Foam Double Tape 4P	SP
760-010	Reinforcement parts	SP
760-011	Servo Holddown w/fasteners	SP
760-012	Rudder Main Assembly	SP
760-013	Rudder	SP
760-014	Fuel Pipe	SP
02057S	Antenna Pipe	SP
HTX-242T	2.4G Radio Control TX	EP
HTX-241RE	2 in 1 ESC/ Receiver	EP
03017	Watercool RC 560 Motor (ST760 only)	EP
SERVO3KGWP	3Kg Servo Unit (Waterproof)	EP
28180	10.8V 1100mah NIMH Battery	EP
E0MU	Multi Charger	EP
21405	Waterproof Brushless ESC (ST760BL only)	OP
21480	Watercool Brushless Motor (ST760BL only)	OP
HTX-RXWP	Waterproof 4Channels 2.4G Receiver	OP
LP1180	Li-Po Battery	OP
A3AU	Li-Po Battery Charger (AU)	OP
A3EU	Li-Po Battery Charger (EU)	OP
A3UK	Li-Po Battery Charger (UK)	OP
A3US	Li-Po Battery Charger (US)	OP